

The Efficiency Comparisons of Resonators for Wireless Power Transfer Using Various Litz Wires

Jaesoon Kwon, Yohan Jang, #Jaehoon Choi

Department of Electronics and Computer Engineering, Hanyang University

17 Haengdang-dong, Seongdong-gu, Seoul, 133-791, Republic of Korea

Tel: +82-2-2220-0376, Fax: +82-2-2293-0377

Email: jurgling@hanyang.ac.kr, dofirst@hanyang.ac.kr,

#choijh@hanyang.ac.kr (corresponding author)

Abstract

In this paper, the efficiency of resonators for WPT using various litz wires is analyzed. By adjusting the value of distance between source coil and resonance coil (D_{SR}) and pitch of resonance coil (P_{RC}), the impedance bandwidth and efficiency of resonators can be optimized. It is observed that the thickness of wire forming resonator is the most critical parameter to determine the performance of a wireless power transfer system.

Keywords : WPT, Coupled magnetic resonance, Litz wire, Resonator

1. Introduction

In 2007, researchers in Massachusetts Institute of Technology (MIT) proposed a Wireless Power Transfer (WPT) system utilizing coupled magnetic resonance [1]. Unlike a previous wireless power transfer technique using inductive coupling, a WPT using coupled magnetic resonance has a longer transmission distance and better directionality. Thus, the WPT system using coupled magnetic resonance is highly regarded as the bright technology of our future. However, the efficiency of this technique sharply decreases as the distance between resonators increases. As a result, the incident power cannot be transferred well at low efficiency. Several techniques have been proposed to improve the efficiency of WPT systems recently [2-3]. In this paper, the efficiency comparisons of resonators for WPT system using various litz wires are investigated.

2. Resonator structures and performances

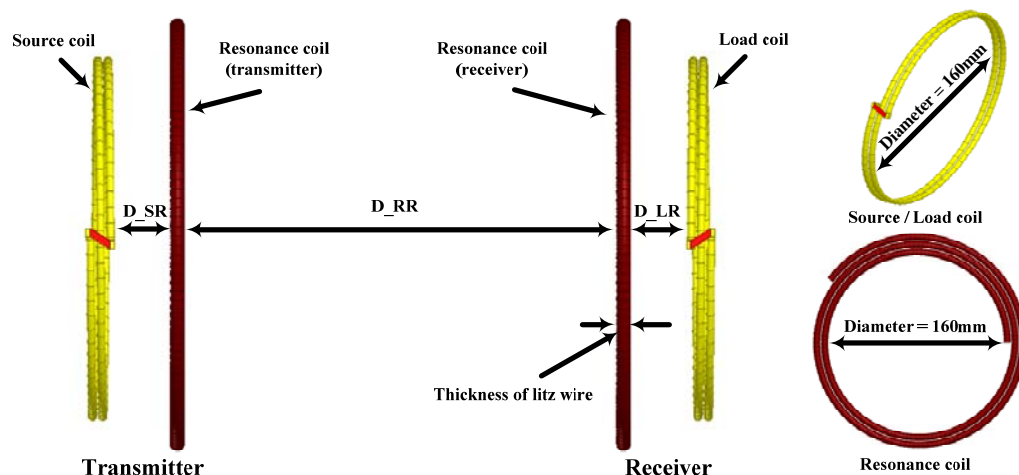


Fig. 1 The geometry of the proposed resonators

The geometry of the proposed resonators using coupled magnetic resonances is shown in Fig 1. The proposed resonators consist of source-coil, resonance-coil (transmitter), resonance-coil

(receiver) and load-coil. The resonance-coils of transmitter and receiver (copper, $\sigma = 5.8 \times 10^7$ S/m) using litz wire have the same diameter of 160 mm and source- and load-coils of helical type also have the size with the thickness of 3.6 mm. Resonance coils used to investigate the efficiency have the dimensions of 0.1 mm x 500, 0.1 mm x 1000 and 0.1 mm x 1500 (diameter of one strand x number of strand). The thicknesses of 0.1 mm x 500, 0.1 mm x 1000 and 0.1 mm x 1500 litz wires are 3 mm, 4.8 mm and 6.3 mm, respectively. Litz wire is a type of cable used in electronic devices to carry alternating current. This wire is designed to reduce the skin effect and proximity effect losses in conductors [4]. It consists of many thin wires strands. The resonator structures are designed using a commercial simulation tool (HFSS, ver.13). In simulation, the litz wire is modeled as a single strand which has the same thickness as that of an actual litz wire. The measured inductance of an actual litz wire using LCR meter is $5.64 \mu\text{H}$ and the inductance of a simulated litz wire using Q3D extractor is $5.3 \mu\text{H}$.

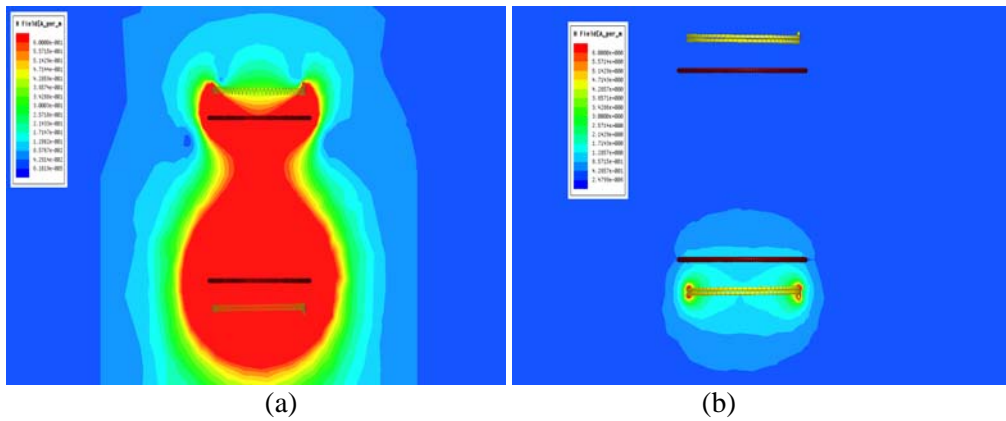


Fig. 2 H-field characteristics of the proposed resonators (a) when the resonators have the same resonant frequency (13.83 MHz) (b) when the resonators have the different resonant frequency

The H-field characteristics of the proposed resonators are shown in Fig. 2. The magnitude of H-field in Fig. 2 shows the power intensity of resonators. As shown in Fig. 2(a), a power transfer is possible when the resonant frequencies of transmitting and receiving of resonators are the same. If the resonant frequencies are not the same, the incident power is not transferred well to receiver as shown in Fig. 2(b). For good impedance bandwidth and efficiency of resonators, a choice of proper distance between source-coil and resonance-coil (D_{SR}), pitch of resonance-coil (P_{RC}) and thickness of litz wire is important.

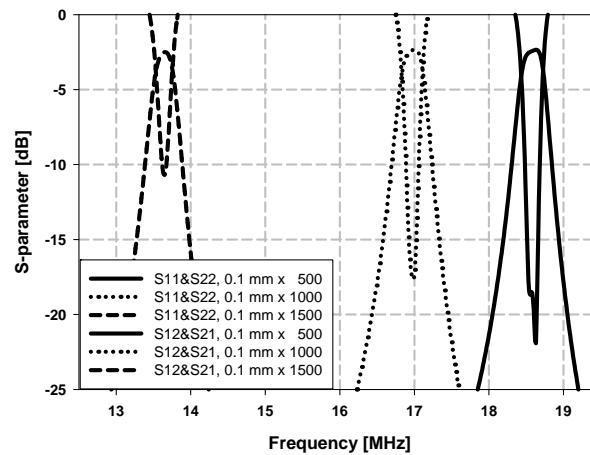


Fig. 3 The variation of resonant frequency of resonators for various thicknesses of litz wire

The variation of resonant frequency of resonators for various thicknesses of litz wire is shown in Fig. 3. As the thickness of resonators is increased, the resonant frequency becomes lower.

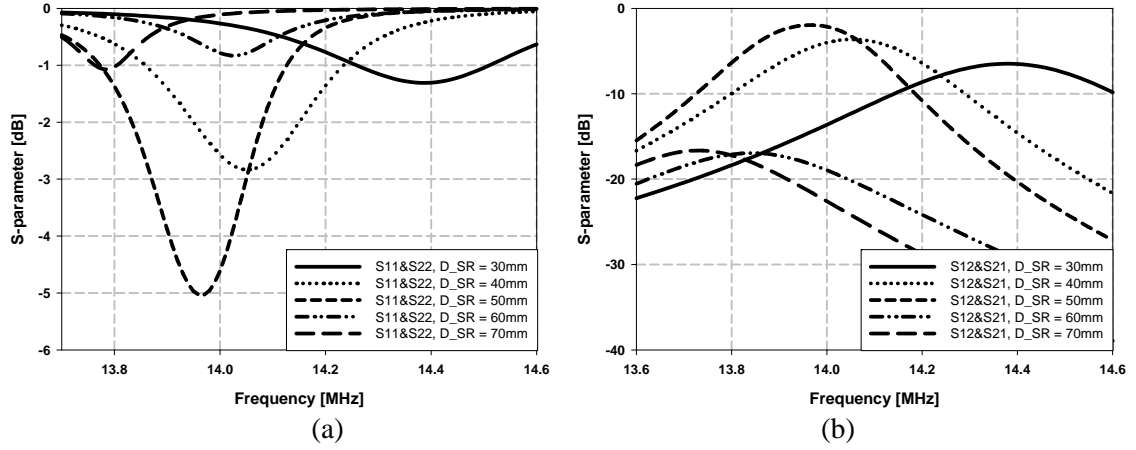


Fig. 4 S-parameter characteristics of the 0.1mm x 1500 litz wire for various D_{SR} (30mm, 40mm, 50mm, 60mm, 70mm)

The S-parameter characteristics for various D_{SR} values are shown in Fig. 4. As the distance D_{SR} is increased, the resonant frequency becomes lower. As shown in Fig. 4, the impedance bandwidth and efficiency of resonators are the best when D_{SR} is 50mm and the bandwidth and efficiency is the worst when D_{SR} is 60mm.

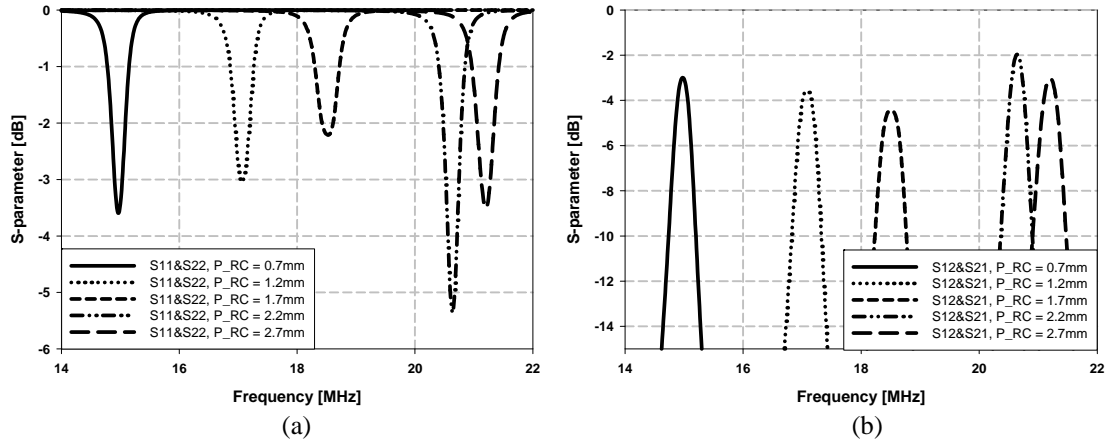


Fig. 5 The S-parameter characteristics of the 0.1mm x 1500 litz wire for P_{RC} values (0.7mm, 1.2mm, 1.7mm, 2.2mm, 2.7mm)

The S-parameter characteristics for different P_{RC} values are shown in Fig. 5. As P_{RC} is increased, the resonant frequency becomes high. As shown in Fig. 4 and 5, the effect of P_{RC} on the resonant frequency of resonance-coil is higher than D_{RC} . By adjusting the value of D_{SR} , P_{RC} and thickness of litz wire, the impedance bandwidth and efficiency of resonators can be improved as shown in Fig. 4 and 5.

3. Results

Table 1: Parameters for resonators using various litz wires

	0.1 mm x 500	0.1 mm x 1000	0.1 mm x 1500
Coil thickness	3 mm	4.8 mm	6.3 mm
D_{SR}	54 mm	45 mm	50 mm
D_{RR}	160 mm	160 mm	160 mm
RC_{turn}	7.5	6.8	6.5
P_{RC}	0.3 mm	0.3 mm	0.3 mm

The geometrical parameters for resonators using various litz wires are shown in Table 1. D_{RR} represents the distance between resonance coils. RC_{turn} stands for the number of turns of

resonance coil. The resonator structures were designed and analyzed using a High Frequency Structure Simulator (HFSS Ver.13) [5].

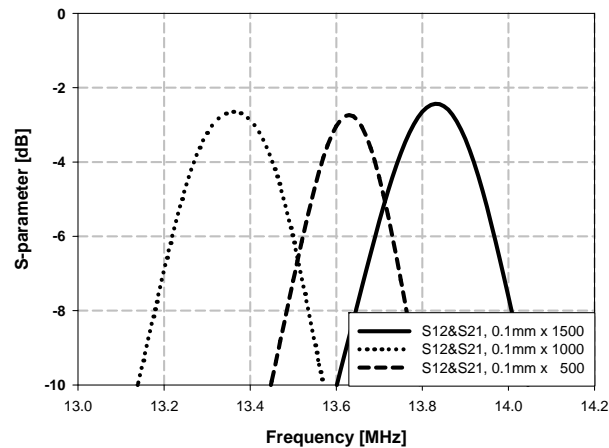


Fig. 6 The efficiency comparison of the proposed resonators

The efficiency comparison of the proposed resonators is shown in Fig 6. The maximum efficiency of the resonator was obtained when 0.1 mm x 1500 litz wires were used for resonators. The efficiencies of resonators using three different litz wires listed in Table 1 were 53.70 % ($S_{21} = -2.70$ dB, 0.1mm x 500), 54.95 % ($S_{21} = -2.6$ dB, 0.1mm x 1000), 57.10 % ($S_{21} = -2.43$ dB, 0.1mm x 1500), respectively.

4. Conclusion

In this paper, the efficiency of resonators using various litz wires is analyzed. The efficiencies of resonators and impedance bandwidth are dependent upon D_{SR} , P_{RC} and the thickness of litz wire. The maximum efficiency is obtained 0.1mm x 1500 litz wire is used as resonator.

References

- [1] Andre' Kurs, Aristeidis Karalis, Robert Moffatt, K. D. Joannopoulos, Peter Fisher, Marin Soljagic, " Wireless Power Transfer via Strongly Coupled Magnetic Resonances", Science, vol. 317, 6 July 2007.
- [2] Bingnan Wang, Tamotsu Nishino, Koon Hoo Teo, " Wireless power transmission efficiency enhancement with metamaterials", IEEE International Conference, page 1-4, 2010.
- [3] RamRakhyani, A.K.; Mirabbasi.; Mu Chiao.; "Design and Optimization of Resonance-Based Efficient Wireless Power Delivery Systems for Biomedical Implants", IEEE Transactions, vol. 5, pp. 48, 2011. 2.
- [4] Wikipedia, the free encyclopedia, http://en.wikipedia.org/wiki/Litz_wire.
- [5] Ansoft High Frequency Structure Simulator (HFSS), Ver.13, Ansoft Corporation.

Acknowledgments

1. This research was supported by LG electronics Inc., Korea
2. This research was supported by the Ministry of Knowledge Economy, Korea, under the Information Technology Research Center support program supervised by the Institute of Information Technology Advancement.